

FORM PTO-1390
(REV 10-96)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

70559-2/8241

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

08/952998

INTERNATIONAL APPLICATION NO.

PCT/SE97/00886

INTERNATIONAL FILING DATE

27 May 1997

PRIORITY DATE CLAIMED

29 May 1996

TITLE OF INVENTION A TURBO-GENERATOR PLANT

APPLICANT(S) FOR DO/EO/US

LEIJON, Mats et al. [SEE ATTACHMENT A]

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
Request
International Application as filed

17. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EPO or JPO \$930.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
..... \$720.00No international preliminary examination fee paid to USPTO (37 CFR 1.482)
but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00Neither international preliminary examination fee (37 CFR 1.482) nor
international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1070.00International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e))

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	44 - 20 =	24	X \$22.00
Independent claims	4 - 3 =	1	X \$82.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			\$270.00

TOTAL OF ABOVE CALCULATIONS =

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

SUBTOTAL =

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f))

TOTAL NATIONAL FEE =

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

TOTAL FEES ENCLOSED =

Amount to be:
refunded \$
charged \$a. ☒ A check in the amount of \$ 1,680.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 23-0576. A duplicate copy of this sheet is enclosed.NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

John P. DeLuca, Esq.
WATSON COLE STEVENS DAVIS, P.L.L.C.
1400 K Street, N.W., Suite 1000
Washington, DC 20005-2477

SIGNATURE:

John P. DeLuca

25,505

REGISTRATION NUMBER

NOV 26 1997

08/952996

88 Rec'd PCT/PTO 28 NOV 1997

70559-2/8241

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	PATENT
)	
Mats LEIJON et al.)	Group: Unknown
)	
New appln. based on)	Examiner: Unknown
PCT/SE97/00886)	
)	
Serial No: To be assigned)	
)	
Filed: On Even Date)	
)	<u>ATTN: BOX PCT</u>
A TURBO-GENERATOR PLANT)	

* * * * *

PRELIMINARY AMENDMENT

Washington, D.C.

Assistant Commissioner for Patents
Washington, D.C. 20231

NOV 28 1997

Sir:

Concurrently with the U.S. national filing of this application, please amend the present application as follows:

IN THE CLAIMS:

Cancel claim 30 and amend claims 1-29 and 31-32 as follows:

Claim 1. (Amended) A plant for generating active and reactive electric power for a high-voltage distribution or transmission network [(110)], comprising at least one electric generator [(200) which is] coupled to at least one of a gas and[/or] steam turbine [(102)] via a shaft means [(101) and comprises] comprising at least

one winding, [characterized in that] wherein the winding of at least one of the electric generators comprises a solid insulation system comprising at least two semiconducting layers, each layer constituting essentially an equipotential surface, and also intermediate solid insulation, wherein at least one of the layers has substantially the same coefficient of thermal expansion as the solid insulation.

Claim 2 (Amended), line 1, delete "characterized in";

Line 2, delete "that" and insert --wherein--.

Claim 3. (Amended) A plant as claimed in claim 2, wherein [characterized in that the] flux paths in the core of the magnetic circuit comprise at least one of [consist of] laminated sheet and[/or] cast iron and[/or] powder-based iron and[/or] forged iron.

Claim 4. (Amended) A plant as claimed in [any of claims] claim 1[-3], [characterized in that] wherein the solid insulation is built up of a cable [(6)] intended for high voltage, comprising one or more current-carrying conductors [(31)] surrounded by at least two semiconducting layers [(32, 34)] and intermediate insulating layers [(33)] of solid insulation.

Claim 5. (Amended) A plant as claimed in claim 4, [characterized in that] wherein the innermost semiconducting layer [(32)] is at substantially the same potential as the conductor(s) [(31)].

Claim 6. (Amended) A plant as claimed in [either] claim 4 [or claim 5], [characterized in that] wherein [one of] the outer semiconducting layer[s (34)] is

arranged to form essentially an equipotential surface surrounding the conductor(s) [(31)].

Claim 7 (Amended), line 1, delete "characterized in";

Line 2, delete "that" and insert --wherein--; delete "(34)".

Claim 8 (Amended), line 1, delete "characterized in";

Line 2, delete "that" and insert --wherein--.

Claim 9. (Amended) A plant as claimed in [any of claims] claim 4[-8], [characterized in that] wherein at least two of said layers have substantially the same coefficient of thermal expansion.

Claim 10. (Amended) A plant as claimed in [any of claims] claim 4[-6], [characterized in that] wherein the current-carrying conductor comprises a plurality of strands, only a few of the strands not being insulated from each other.

Claim 11. (Amended) A plant as claimed in [any of claims] claim 1[-10], [characterized in that] wherein the winding comprises [consists of] a cable comprising one or more current-carrying conductors [(2)], each conductor [consisting of] including a number of strands, an inner semiconducting layer [(3)] being arranged around each conductor, an insulating layer [(4)] of solid insulation being arranged around each inner semiconducting layer [(3)] and an outer semiconducting layer [(5)] being arranged around each insulating layer [(4)].

Claim 12 (Amended), line 1, delete "characterized in";

Line 2, delete "that" and insert --wherein--; delete "also".

Claim 13. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein at least one electric generator [(200)] is arranged to supply the out-going electric network [(110)] directly without any intermediate connection of a step-up transformer (unit transformer).

Claim 14. (Amended) A plant as claimed in [any of the preceding claims] claim 1, [characterized in that] wherein at least one generator [(200)] is arranged to supply an out-going network [consisting of] comprising at least two part-networks, at least one part-network being supplied via an intermediate system transformer.

Claim 15. (Amended) A plant as claimed in [any of the preceding claims], claim 1, comprising [characterized in that it comprises] several generators, each of which lacks an individual step-up transformer but which, via a system transformer common to the generators, is connected to the transmission or distribution network [(110)].

Claim 16. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the windings [(9, 51-53)] of the stator [(1)] in at least one generator [(200)] are arranged for connection to more than one voltage level.

Claim 17. (Amended) A plant as claimed in claim 15, [characterized in that] wherein one of said voltage levels relates to generation of auxiliary power, this being generated from a separate winding [(9)] in the generator [(200)].

Claim 18. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein at least one generator [(200)] is earthed via an impedance.

Claim 19. (Amended) A plant as claimed in [any of claims] claim 1-17, characterized in that] , wherein at least one generator [(200)] is directly earthed.

Claim 20. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the stator [(1)] of the generator [(200)] is cooled at earth potential by means of a flow of gas and/or liquid.

Claim 21. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the cables [(6)] intended for high voltage have a conductor area of between about 50 and 3000 mm² and have an outer diameter of between about 20 and 250 mm.

Claim 22. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein at least one winding [(9, 51-52)] of the stator [(1)] is carried out with integral slot winding.

Claim 23. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein at least one winding [(9, 51-52)] of the stator [(1)] is carried out with fractional slot winding.

Claim 24. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the rotor [(2)] of at least one generator is arranged for at least one of two [or] and four poles.

Claim 25. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the voltage level is controllable $\pm 20\%$ of the rated voltage.

Claim 26. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the winding of the generator is arranged for self-regulating field control [and lacks] free of auxiliary means for control of the field.

Claim 27. (Amended) A plant as claimed in [any of the preceding claims, characterized in that] claim 1, wherein the stator of at least one generator is composed of axially combined, plate-shaped sections, preferably as whole sections in peripheral direction.

Claim 28. (Amended) A plant for generating active and reactive electric power for a high-voltage distribution or transmission network [(110)], comprising at least one electric generator [(200)] which is coupled to at least one of a gas and/or a steam turbine [(102)] via a shaft means [(101)] and comprises at least one winding, [characterized in that] wherein the winding of at least one of the electric generators comprises an insulation system which, as regards its thermal and electrical properties, permits a voltage level in excess of 36 kV.

Claim 29. (Amended) An electric generator [(200)] arranged to be coupled to at least one of a gas and/or steam turbine [(102)] via a shaft means [(101)] and comprising at least one winding, [characterized in that] wherein the winding comprises a solid insulation system consisting of at least two semiconducting layers, each layer constituting essentially an equipotential surface, and also intermediate

solid insulation, wherein at least one of the layers has substantially the same coefficient of thermal expansion as the solid insulation.

Claim 31. (Amended) A procedure for manufacturing an electric generator as claimed in claim 29 [or claim 30, characterized in that] wherein the stator is wound at the plant site where the generator is to be used.

Claim 32 (Amended), line 1, delete "characterized";

Line 2, delete "in that" and insert --wherein--.

Add new claims 33-44 as follows:

---33. A plant for generating active and reactive power for a high-voltage distribution including at least one rotating high voltage electric machine comprising a stator; a rotor and a winding, wherein said winding comprises a cable including at least one current-carrying conductor and a magnetically permeable, electric field confining cover surrounding the conductor, said cable forming at least one uninterrupted turn in the corresponding winding of said machine.

34. The plant of claim 33, wherein the cover comprises an insulating layer surrounding the conductor and an outer layer surrounding the insulating layer, said outer layer having a conductivity sufficient to establish an equipotential surface around the conductor.

35. The plant of claim 33, wherein the cover comprises an inner layer surrounding the conductor and being in electrical contact therewith; an insulating layer surrounding the inner layer and an outer layer surrounding the insulating layer.

36. The plant of claim 35, wherein the inner and outer layers have semiconducting properties.

37. The plant of claim 33, wherein the cover is formed of a plurality of layers including an insulating layer and wherein said plurality of layers are substantially void free.

38. The plant of claim 33, wherein the cover is in electrical contact with the conductor.

39. The plant of claim 33, wherein the layers of the cover have substantially the same temperature coefficient of expansion.

40. The plant of claim 39, wherein the machine is operable at 100% overload for two hours.

41. The plant of claim 33, wherein the cable is operable free of sensible end winding loss.

42. The plant of claim 33, wherein the winding is operable free of partial discharge and field control.

43. The plant of claim 33, wherein the winding comprises multiple uninterrupted turns.


44. The plant of claim 33, wherein the cable is flexible.--

If any multiple dependencies exist in the claims, it is respectfully requested that such dependencies be removed

REMARKS

By this Preliminary Amendment claims have been amended to better conform the claims with U.S. practice and to remove multiple dependencies therefrom. New claims set forth the invention in a different scope.

Respectfully submitted,



John P. DeLuca
Registration No. 25,505

JPD:jlh

WATSON COLE STEVENS DAVIS, P.L.L.C.
1400 K Street, N.W., Suite 1000
Washington, D.C. 20005-2477
(202) 628-0088

A TURBO-GENERATOR PLANT**Technical field:**

The present invention relates to equipment, primarily in thermal power plants, for generating active and reactive electric power for high-voltage distribution or transmission networks connected to it. More specifically the invention relates to rotating electro-mechanical equipment for generating electric power for high-voltage distribution or transmission networks without intermediate transformers. The generator or generators included in the equipment have a magnetic circuit, normally comprising a core of iron and an air gap, a cooling system and at least one, usually two, windings disposed in the stator and rotor, respectively.

Background art:

Thermal power plants are nowadays built in accordance with a number different principles. Various types of fuel, e.g. natural gas, oil, bio-fuel, coal, mixtures of the fuels just mentioned, or nuclear fuel, are used in order to achieve high temperature in a gas in either a combustion process or a nuclear process. This gas may be either waste gases from the combustion or indirectly heated steam. The heating is performed in a relatively small volume, which means that the pressure is extremely high. The hot gas is then conveyed in gradually larger and larger volumes, the thermal energy then being converted to kinetic energy. The fast-moving gas is allowed in a number of steps to influence the vanes in a turbine, thereby giving rise to a turning phase. At least one generator mounted on the same shaft as the turbine, or via a gear, converts the energy to electric power which, via a step-up transformer, is emitted to distribution or transmission networks, hereinafter also termed power networks.

Power plants consisting of only one unit in accordance with one of the principles explained above can naturally be the best solution in certain cases. However, a plant is often advantageously built up of more units. This offers greater flexibility and robustness against interference in the equipment. Various units may also be designed for operation with different types of fuel so that the fuel that is currently cheapest can be used. Other combinations are possible to increase the total efficiency of the plant, where residual heat from one unit can be utilized by another.

A distinction is normally made between two types of turbines: gas turbines and steam turbines. Gas turbines are operated directly by combustion gases (possibly after cleaning), whereas steam turbines, as the name implies, are operated by steam heated to high pressure.

- 5 Vital parts of a gas turbine unit include at least one compressor step, a combustion chamber, at least one turbine step and a generator. In many cases it is advantageous for the actual turbine step to be in several steps in order to enable optimal utilization of the thermal energy. Each step is dimensioned for the pressure
10 the gas has in the relevant part of the turbine. Typically a high and a low pressure part are used, or a high, an intermediate and a low pressure part. The compressor may also be designed in several steps, normally two. The pressure in the compressor step is adjusted in order to obtain optimal combustion. The air entering
15 the combustion chamber is pre-heated.

- Vital parts of a steam turbine unit include a combustion or reactor hearth, steam generator, steam turbine and an electric generator. The steam generator consists typically of steel pipes with water circulating in them, which pipes are located in the hearth in order
20 to obtain optimal heat transfer. The steam, heated to high temperature and high pressure, is conveyed to the turbine. The steam turbine can also advantageously be divided into various sections in the same way as described above, depending on pressure.

- In order to achieve the highest possible efficiency, a combination
25 of both these turbine types is advantageously used in two steps, i.e. a combined cycle power plant. For example, a gas turbine power plant which generates most of its power via a gas turbine, is supplemented by a steam generator which utilizes residual heat in the waste gases after the last turbine step, thus obtaining add-
30 itional energy yield. A coal power plant of PFBC (Pressurized Fluidized Bed Combustion) type, which today represents the best that can be achieved as regards efficiency and environmentally friendly combustion of coal, generates the majority of its electric energy via a steam generator in the hearth. The combustion gases,
35 somewhat cooled after the steam generation, are conveyed to a gas turbine after dust separation.

Many power plants are also used for district heating and in many cases an extremely high degree of total efficiency is attainable.

- Examples of relevant plant types are described below. A gas
40 turbine in these plants is fired with gas (preferably natural gas), oil or a combination of gas and oil.

Gas turbine power plant

A plant consisting of one or more units, each comprising one gas turbine and associated generator.

Combined cycle multi-shaft gas turbine power plant

- 5 A plant consisting of one or more units, each comprising a gas turbine and associated electric generator, in which the hot gases from the gas turbines are conveyed to a heat exchanger for steam generation. The steam drives a steam turbine and associated electric generator.

10 Combined cycle single-shaft gas turbine power plant

- A plant consisting of one or more units, each comprising a gas turbine and associated electric generator, in which the hot gases from the gas turbines are conveyed to a heat exchanger for steam generation. The steam drives a steam turbine connected to the
15 "free end" of one of the gas turbines.

Steam power plant

- A plant in which a combustion process (such as oil, coal, PFBC, bio-fuel) via a steam generator (pipes conveying water which are located in the hearth) generates a steam pressure which drives a
20 steam turbine and associated electric generator.

Nuclear power plant

A plant similar to the steam power plant but with the steam generator located in a nuclear reactor hearth.

- Common to all the power plants described above is the connection of
25 an electric generator via a common shaft, or via a gear, to the turbine for conversion to electric power. An electric generator may also be connected to two turbines. The conversion usually takes place in a synchronous generator which can be used for generating reactive power as well as for converting active power.
30 Usually these are 2-pole or 4-pole electric generators of turbo-generator type, but other pole numbers and embodiments exist. A typical voltage range for today's generators is 10-30 kV.

- An intermediate unit is used to enable reliable connection of the generator to an out-going power network. As is clear from Figure
35 3, insulated busbar systems run from the output terminal of the generator 100 to a generator breaker with isolator 107. The busbar

systems continue to an auxiliary power transformer 109 and to a step-up transformer 106. The two oil-filled transformers are normally placed outdoors because of the risk of explosion. Some form of explosion-proof wall is also often used to protect the plant. Connection to the out-going network 110 is via another breaker and isolator 108 in a high-voltage switchgear outside the plant. This switchgear is preferably common to several units in the plant.

An alternative to allowing the step-up transformer 106 of each generator 100 be connected directly to the out-going power network 110 is to use the step-up transformer to transform the generator voltage to an intermediate voltage level and then connect this intermediate voltage level via a system transformer to the out-going power network 110. In a limited area or a plant with several units, this may offer a cheaper total solution, particularly if the power in each unit is slight in relation to the voltage level of the out-going power network.

The drawbacks of the above solutions are related to the low voltage level (10-30 kV) of the generator. The busbar systems must be dimensioned with a large copper area to keep down the losses. The generator breaker 107 becomes large and expensive in order to break the high currents resulting from the low voltage. The step-up transformer 106 is expensive and also constitutes a safety risk. It also causes deteriorated efficiency.

The magnetic circuit in individual electric generators usually comprises a laminated core, e.g. of sheet steel with a welded construction. To provide ventilation and cooling the core is often divided into stacks with radial and/or axial ventilation ducts. For larger machines the laminations are punched out in segments which are attached to the frame of the machine, the laminated core being held together by pressure fingers and pressure rings. The winding of the magnetic circuit is disposed in slots in the core, the slots generally having a cross section in the shape of a rectangle or trapezium.

In multi-phase electric generators the windings are made as either single or double layer windings. With single layer windings there is only one coil side per slot, whereas with double layer windings there are two coil sides per slot. By coil side is meant one or more conductors combined vertically or horizontally and provided with a common coil insulation, i.e. an insulation designed to withstand the rated voltage of the generator to earth.

Double-layer windings are generally made as diamond windings whereas single layer windings in the present context can be made as diamond or flat windings. Only one (possibly two) coil width exists in diamond windings whereas flat windings are made as concentric windings, i.e. with widely varying coil width. By coil width is meant the distance in arc dimension between two coil sides pertaining to the same coil.

Normally all large machines are made with double-layer winding and coils of the same size. Each coil is placed with one side in one layer and the other side in the other layer. This means that all coils cross each other in the coil end. If there are more than two layers these crossings complicate the winding work and the coil end is less satisfactory.

It is considered that coils for rotating generators can be manufactured with good results within a voltage range of 10 - 20 kV.

Attempts to develop the generator for higher voltages however, however, been in progress for a long time. This is obvious, for instance from "Electrical World", October 15, 1932, pages 524-525. This describes how a generator designed by Parson 1929 was arranged for 33 kV. It also describes a generator in Langerbrugge, Belgium, which produced a voltage of 36 kV. Although the article also speculates on the possibility of increasing voltage levels still further, the development was curtailed by the concepts upon which these generators were based. This was primarily because of the shortcomings of the insulation system where varnish-impregnated layers of mica oil and paper were used in several separate layers.

Some attempts at a new approach as regards the design of synchronous generators are described, for instance, in an article "Water-and-oil-cooled Turbo-generator TVM-300" in J. Elektrotechnika, No. 1, 1970, pages 6-8 in US 4,429,244 "Stator of generator" and in Russian patent specification CCCP Patent 955369.

The water-and-oil-cooled synchronous machine described in J. Elektrotechnika is intended for voltages of up to 20 kV. The article describes a new insulation system consisting of oil/paper insulation, allowing the stator to be entirely immersed in oil. The oil can then be used as coolant while also serving as insulation. To prevent oil in the stator from leaking out to the rotor, a dielectric oil-separating ring is provided at the internal surface of the core. The stator winding is manufactured from conductors with an oval, hollow shape, provided with oil and paper insulation. The coil sides with their insulation are retained in the slots formed with rectangular cross section by means of wedges. Oil is

used as coolant both in the hollow conductors and in apertures in the stator walls. However, such cooling systems entail a large number of connections for both oil and electricity at the coil ends. The thick insulation also causes increased radius of curvature on the conductors, which in turn results in increased size for the coil overhang.

The above-mentioned US patent relates to the stator part of a synchronous machine comprising a magnetic core of laminated plate with trapezium-shaped slots for the stator winding. The slots are stepped since the need for insulation in the stator winding is less in towards the rotor where the part of the winding nearest the neutral point is located. The stator part also includes a dielectric oil-separating cylinder nearest the inner surface of the core. This part may require more excitation than a machine without this ring. The stator winding is manufactured from oil-saturated cables having the same diameter for each coil layer. The layers are separated from each other by means of spacer elements in the slots, and secured with wedges. Specific to the winding is that it consists of two so-called half-windings connected in series. One of these two half-windings is placed centrally inside an insulating sleeve. The conductors of the stator winding are cooled by the surrounding oil. A drawback with so much oil in the system is the risk of leakage and the major clean-up work necessary after a fault condition. The parts of the insulation sheath located outside the slots have a cylindrical part and a conical screen electrode, the purpose of which is to control the electric field strength in the area where the cable leaves the laminations.

CCCP 955369 reveals in another attempt to increase the rated voltage of the synchronous machine, that the oil-cooled stator winding consists of a high-voltage cable having the same dimension for all layers. The cable is placed in stator slots shaped as circular, radially located openings corresponding to the cross-sectional area of the cable and space required for fixing and coolant. The various radially placed layers of the winding are surrounded by and secured in insulating tubes. Insulating spacer elements fix the tubes in the stator slot. Here too, because of the oil cooling, an inner dielectric ring is required to seal the oil coolant from the inner air gap. The construction shows no stepping of the insulation or of the stator slots. The design shows a very small radial waist between the various stator slots, entailing a large slot stray flux which strongly affects the excitation requirement of the machine.

In a report from the Electric Power Research Institute, EPRI, EL-3391 from April 1984, an account is given of generator concepts for achieving higher voltage in an electric generator with the object of being able to connect such a generator to a power network without intermediate transformers. Such a solution is assessed in the report to offer good gains in efficiency and considerable financial advantages. The main reason that it was deemed possible in 1984 to start developing generators for direct connection to power networks was that a supra-conducting rotor had been developed at that time. The considerable excitation capacity of the supra-conducting field enables the use of airgap-winding with sufficient thickness to withstand the electrical stresses.

By combining the concept deemed most promising according to the project, that of designing a magnetic circuit with winding, known as "monolithic cylinder armature", a concept in which two cylinders of conductors are enclosed in three cylinders of insulation and the whole structure is attached to an iron core without teeth, it was assessed that a rotating electric machine for high voltage could be directly connected to a power network. The solution entailed the main insulation having to be made sufficiently thick to withstand network-to-network and network-to-earth potentials. Obvious drawbacks with the proposed solution, besides its demanding a supra-conducting rotor, are that it also requires extremely thick insulation, which increases the machine size. The coil ends must be insulated and cooled with oil or freones in order to control the large electric fields at the ends. The whole machine must be hermetically enclosed in order to prevent the liquid dielectric medium from absorbing moisture from the atmosphere.

30 Description of the invention:

Against this background the object of the invention is to provide a plant comprising at least one generator for such a high voltage that the step-up transformer becomes superfluous. The generator breaker then also becomes superfluous. Functionally this is replaced by the already existing high-voltage breaker. The busbar system is replaced with screened high-voltage cable. It is thus an object of the invention to connect the electric generators in a power plant directly to the out-going power network.

This object has been achieved according to the invention from a first aspect in that a plant of the type described in the preamble to claim 1 comprises the special features defined in the characterizing part of this claim, from a second aspect in that a generator

of the type described in the preamble to claim 29 comprises the special features defined in the characterizing part of this claim, and through the procedure described in claim 31.

Thanks to this design of the insulation system for the winding, the decomposition of the insulation is avoided which tends to appear in the relatively thick-walled insulating layers used conventionally for high-voltage generators, e.g. impregnated layers of mica tape, which decomposition is in some part caused by partial discharges, PD. Inner corona discharges occur in cavities, pores and the like which are present in these conventional insulations, and which arise during manufacture, when the insulation is subjected to excessive electrical field strengths. These corona discharges gradually break down the material and may result in electrical disruptive discharge through the insulation. Other defects, cracks or the like, occurring at thermal movement in the winding are avoided, thanks to the temperature coefficients of the layers being substantially equal. These problems constitute an important reason for it having been impossible to design generators for the voltage range above 36 kV previously.

This problem has been eliminated by the insulation system according to the invention. The insulation system according to the invention can be achieved by using layers for the insulation which are manufactured in such a way that the risk of cavities and pores is minimal, e.g. extruded layers of suitable permanent insulating material, such as PEX, thermo-plastics, including cross-linked thermo-plastics, EP rubber, other types of rubber, etc. By using only insulating layers which can be produced with a minimum of defects and also providing the insulation with an inner and an outer semiconducting part, it can be ensured that the thermal and electrical loading is reduced. In the event of temperature gradients, the insulating part with semiconducting layers will constitute a monolithic part and defects caused by different expansion due to temperature in the insulation and surrounding layers will not occur. The electrical load on the material decreases as a result of the semiconducting parts around the insulation constituting equipotential surfaces and of the electrical field in the insulation part thus being distributed uniformly over the thickness of the insulation. The outer semiconducting layer can be connected to earth potential. This means that, for such a cable, the outer sheath of the winding can be maintained at earth potential along its entire length.

The special features of a plant according to the invention, particularly as relating to the insulation system for the winding in the generator stator, have thus eliminated the obstacles preventing an increase in voltage level, and enable elimination of the step-up transformer even for voltages above 36 kV, with the associated advantages.

In the first place the mere absence of a transformer entails great savings in weight, space and expense.

When the transformer, as is often the case, is arranged at a distance from the turbine hall, busbars are required to connect generator and transformer. The need for these is thus also eliminated which saves not only the expense and space they require - the power losses in these, which are considerable since the current is high, also disappear in busbar systems 2-phase and 3-phase faults can occur and the breakers and isolators required therefor demand a high level of maintenance. By the present invention the risk for these faults has been greatly reduced.

The fire risk entailed with an oil-insulated transformer is also reduced, thereby reducing the necessity for safety precautions against fire.

The turbo-generator plant according to the invention also has the advantage that it can be arranged with several connections to different voltage levels.

In all, the advantages mentioned above constitute radically improved total economy for the plant. The costs of building the plant are dramatically reduced and operating economy is improved by less need of service and maintenance and by an increase in the efficiency of approximately 0.5-1.5 %.

The invention is also applicable and entails advantages for a turbo-generator for peak loads, used as synchronous compensator when necessary, so that the generator is disconnected from the turbine.

The purpose of the invention is also that auxiliary power shall be generated by the generator by means of an auxiliary power winding inserted in its stator, which gives considerably lower voltage than is generated by the main winding of the generator.

To accomplish this the magnetic circuit in the generator or generators included in the turbo-generator plant is formed with threaded permanent insulating cable with included earth.

The major and essential difference between known technology and the embodiment according to the invention is thus that this is achieved with a magnetic circuit included in an electric generator which is arranged to be directly connected via possible breakers and isolators to a high supply voltage in the vicinity of between 20 and 800 kV, preferably higher than 36 kV. The magnetic circuit thus comprises a laminated core having at least one winding consisting of a threaded cable with one or more permanently insulated conductors having a semiconducting layer both at the conductor and outside the insulation, the outer semiconducting layer being connected to earth potential.

To solve the problems arising with direct connection of electric machines to all types of high-voltage power networks, the generator in the plant according to the invention has a number of features as mentioned above, which differ distinctly from known technology. Additional features and further embodiments are defined in the dependent claims and are discussed in the following.

Such features mentioned above and other essential characteristics of the generator and thus of the turbo-generator plant according to the invention include the following:

- The winding of the magnetic circuit is produced from a cable having one or more permanently insulated conductors with a semiconducting layer at both conductor and sheath. Some typical conductors of this type are PEX cable or a cable with EP rubber insulation which, however, for the present purpose are further developed both as regards the strands in the conductor and the nature of the outer sheath. PEX = crosslinked polyethylene (XLPE). EP = ethylene propylene.
- Cables with circular cross section are preferred, but cables with some other cross section may be used in order to obtain better packing density, for instance.
- Such a cable allows the laminated core to be designed according to the invention in a new and optimal way as regards slots and teeth.
- The winding is preferably manufactured with insulation in steps for best utilization of the laminated core.
- The winding is preferably manufactured as a multi-layered, concentric cable winding, thus enabling the number of coil-end intersections to be reduced.

• The slot design is suited to the cross section of the winding cable so that the slots are in the form of a number of cylindrical openings running axially and/or radially outside each other and having an open waist running between the layers of the stator winding.

• The design of the slots is adjusted to the relevant cable cross section and to the stepped insulation of the winding. The stepped insulation allows the magnetic core to have substantially constant tooth width, irrespective of the radial extension.

10 • The above-mentioned further development as regards the strands entails the winding conductors consisting of a number of impacted strata/layers, i.e. insulated strands that from the point of view of an electric machine, are not necessarily correctly transposed, uninsulated and/or insulated from each other.

15 • The above-mentioned further development as regards the outer sheath entails that at suitable points along the length of the conductor, the outer sheath is cut off, each cut partial length being connected directly to earth potential.

The use of a cable of the type described above allows the entire length of the outer sheath of the winding, as well as other parts of the plant, to be kept at earth potential. An important advantage is that the electric field is close to zero within the coil-end region outside the outer semiconducting layer. With earth potential on the outer sheath the electric field need not be controlled. This means that no field concentrations will occur either in the core, in the coil-end regions or in the transition between them.

The mixture of insulated and/or uninsulated impacted strands, or transposed strands, results in low stray losses.

30 The cable for high voltage used in the magnetic circuit winding is constructed of an inner core/conductor with a plurality of strands, at least two semiconducting layers, the innermost being surrounded by an insulating layer, which is in turn surrounded by an outer semiconducting layer having an outer diameter in the order of 35 20-200 mm and a conductor area in the order of 50-3000 mm².

Since the generator in a plant according to the invention is manufactured with the special insulation system, the stator need not be completed at the factory but can instead be delivered divided axially into sections and the winding threaded on site.

40 This naturally gives obvious financial advantages from the transport point of view.

The invention thus also relates to a procedure in which this possibility is exploited.

From another aspect of the invention, the objectives listed have been achieved in that a plant of the type described in the preamble to claim 29 is given the special features defined in the characterizing part of this claim.

Since the insulation system, suitably permanent, is designed so that from the thermal and electrical point of view it is dimensioned for over 36 kV, the plant can be connected to high-voltage power networks without any intermediate step-up transformer, thereby achieving the advantages referred to. Such a plant is preferably, but not necessarily, constructed to include the features defined for the plant as claimed in any of claims 1-28.

The above-mentioned and other advantageous embodiments of the invention are defined in the dependent claims.

Brief description of the drawings:

The invention will be described in more detail in the following detailed description of a preferred embodiment of the construction of the magnetic circuit of the electric generator in the turbo-generator plant, with reference to the accompanying drawings in which

Figure 1 shows a schematic axial end view of a sector of the stator in an electric generator in the turbo-generator plant according to the invention,

Figure 2 shows an end view, step-stripped, of a cable used in the winding of the stator according to Figure 1,

Figure 3 shows a schematic diagram for a turbo-generator arrangement according to known technology,

Figure 4 shows a schematic diagram for a turbo-generator arrangement utilizing the present invention, and

Figure 5 shows a schematic diagram for a modified embodiment of the turbo-generator arrangement according to the invention.

Figure 6 is a diagram showing a generator according to the invention with build-in windings for generation of auxiliary power and frequency converter starting in a single shaft generator plant.

Description of a preferred embodiment:

In the schematic axial view through a sector of the stator 1 according to Figure 1, pertaining to the generator or generators included in the turbo-generator plant, the rotor 2 of the generator is also indicated. The stator 1 is composed in conventional manner of a laminated core. Figure 1 shows a sector of the generator corresponding to one pole pitch. From a yoke part 3 of the core situated radially outermost, a number of teeth 4 extend radially in towards the rotor 2 and are separated by slots 5 in which the stator winding is arranged. Cables 6 forming this stator winding, are high-voltage cables which may be of substantially the same type as those used for power distribution, i.e. PEX cables. One difference is that the outer, mechanically-protective sheath, and the metal screen normally surrounding such power distribution cables are eliminated so that the cable for the present application comprises only the conductor and at least one semiconducting layer on each side of an insulating layer. Thus, the semiconducting layer which is sensitive to mechanical damage lies naked on the surface of the cable.

The cables 6 are illustrated schematically in Figure 1, only the conducting central part of each cable part or coil side being drawn in. As can be seen, each slot 5 has varying cross section with alternating wide parts 7 and narrow parts 8. The wide parts 7 are substantially circular and surround the cabling, the waist parts between these forming narrow parts 8. The waist parts serve to radially fix the position of each cable. The cross section of the slot 5 also narrows radially inwards. This is because the voltage on the cable parts is lower the closer to the radially inner part of the stator 1 they are situated. Slimmer cabling can therefore be used there, whereas coarser cabling is necessary further out. In the example illustrated cables of three different dimensions are used, arranged in three correspondingly dimensioned sections 51, 52, 53 of slots 5.

Figure 2 shows a step-wise stripped end view of a high-voltage cable for use in an electric machine according to the present invention. The high-voltage cable 6 comprises one or more conductors 31, each of which comprises a number of strands 36 which together give a circular cross section of copper (Cu), for instance. These conductors 31 are arranged in the middle of the high-voltage cable 6 and in the shown embodiment each is surrounded by a part insulation 35. However, it is feasible for the part insulation 35 to be omitted on one of the conductors 31. In the

present embodiment of the invention the conductors 31 are together surrounded by a first semiconducting layer 32. Around this first semiconducting layer 32 is an insulating layer 33, e.g. PEX insulation, which is in turn surrounded by a second semiconducting layer 34. Thus the concept "high-voltage cable" in this application need not include any metallic screen or outer sheath of the type that normally surrounds such a cable for power distribution.

A turbo-generator plant constructed in accordance with known technology is shown in Figure 3 where a generator 100, as already described in the introduction, is driven by a gas turbine 102 via a common shaft 101. The gas turbine is driven by gas from a combustion chamber 103 controlled by a control device 104 and supplied by a compressor 105. The compressor 105 is arranged on the same shaft 101 as the generator 100 and gas turbine 102.

In the known turbo-generator plant the generator 100 normally generates a voltage of maximally 25-30 kV. To supply a high-voltage distribution or transmission network 110, normally supplying voltages of up to 800 kV, the output voltage from the known generator 100 must be stepped up, as illustrated by the step-up transformer 106. This also requires a generator breaker 107 to be connected between the generator 100 and the step-up transformer 106, which generator breaker comprises at least one set of isolators, power breakers and earth connectors.

Connection to the distribution or transmission network 110 is via additional isolators, breakers and flashover protection, here jointly designated 108.

The output voltage of the generator, lying at a medium voltage level of 25-30 kV, is usually also branched off to a step-down transformer 109. The step-down transformer 109 supplies the generator 100 with excitation voltage via a rectifier circuit 111, and is also able to generate low voltage 112 for other requirements.

Figure 4 shows the same plant as in Figure 3 but utilizing a turbo-generator arrangement according to the present invention. With the invention, the generator 200 which generates the same high voltage (up to approximately 800 kV) as that for which the distribution or transmission network 110 is intended, is directly connected to this distribution or transmission network 110 via conduit 201. There is thus no need for any step-up transformer or generator breaker (106, 107 in Figure 3).

The step-down transformer 109 shown in Figure 4 is supplied from a separate output on the stator winding of the generator 200 for supply of the excitation voltage via the conduit 202 and the rectifier circuit 111, as well as for any other requirement via
5 conduit 112.

As can be seen in Figure 5, the step-down transformer 109 may also be omitted when using a generator 200 constructed in accordance with the invention. The stator winding of the generator 200 (compare Figure 1) is thus provided with separate outputs for the
10 excitation voltage via conduit 202 and the rectifier circuit 111, as well as for any other requirement via the conduit 203.

With the turbo-generator arrangement according to the present invention, therefore, several transformer and breaker units that were previously necessary are eliminated which is obviously
15 advantageous - not least from the expense and operating reliability aspects.

CLAIMS

1. A plant for generating active and reactive electric power for a high-voltage distribution or transmission network (110),
5 comprising at least one electric generator (200) which is coupled to at least one gas and/or steam turbine (102) via a shaft means (101) and comprises at least one winding, characterized in that the winding of at least one of the electric generators comprises a solid insulation system comprising at least two
10 semiconducting layers, each layer constituting essentially an equipotential surface, and also intermediate solid insulation, wherein at least one of the layers has substantially the same coefficient of thermal expansion as the solid insulation.
2. A plant as claimed in claim 1, characterized in
15 that the generator comprises a magnetic circuit with a magnetic core.
3. A plant as claimed in claim 2, characterized in that the flux paths in the core of the magnetic circuit consist of laminated sheet and/or cast iron and/or powder-based iron and/or
20 forged iron.
4. A plant as claimed in any of claims 1-3, characterized in that the solid insulation is built up of a cable (6) intended for high voltage, comprising one or more current-carrying conductors (31) surrounded by at least two
25 semiconducting layers (32, 34) and intermediate insulating layers (33) of solid insulation.
5. A plant as claimed in claim 4, characterized in that the innermost semiconducting layer (32) is at substantially the same potential as the conductor(s) (31).
- 30 6. A plant as claimed in either claim 4 or claim 5, characterized in that one of the outer semiconducting layers (34) is arranged to form essentially an equipotential surface surrounding the conductor(s) (31).
7. A plant as claimed in claim 6, characterized in
35 that said outer semiconducting layer (34) is connected to a selected potential.
8. A plant as claimed in claim 7, characterized in that the selected potential is earth potential.

9. A plant as claimed in any of claims 4-8, characterized in that at least two of said layers have substantially the same coefficient of thermal expansion.

10. A plant as claimed in any of claims 4-6, characterized in that the current-carrying conductor comprises a plurality of strands, only a few of the strands not being insulated from each other.

11. A plant as claimed in any of claims 1-10, characterized in that the winding consists of a cable comprising one or more current-carrying conductors (2), each conductor consisting of a number of strands, an inner semiconducting layer (3) being arranged around each conductor, an insulating layer (4) of solid insulation being arranged around each inner semiconducting layer (3) and an outer semiconducting layer (5) being arranged around each insulating layer (4).

12. A plant as claimed in claim 11, characterized in that the cable also comprises a metal screen and a sheath.

13. A plant as claimed in any of the preceding claims, characterized in that at least one electric generator (200) is arranged to supply the out-going electric network (110) directly without any intermediate connection of a step-up transformer (unit transformer).

14. A plant as claimed in any of the preceding claims, characterized in that at least one generator (200) is arranged to supply an out-going network consisting of at least two part-networks, at least one part-network being supplied via an intermediate system transformer.

15. A plant as claimed in any of the preceding claims, characterized in that it comprises several generators, each of which lacks an individual step-up transformer but which, via a system transformer common to the generators, is connected to the transmission or distribution network (110).

16. A plant as claimed in any of the preceding claims, characterized in that the windings (9, 51-53) of the stator (1) in at least one generator (200) are arranged for connection to more than one voltage level.

17. A plant as claimed in claim 15, characterized in that one of said voltage levels relates to generation of auxiliary power, this being generated from a separate winding (9) in the generator (200).

18. A plant as claimed in any of the preceding claims, characterized in that at least one generator (200) is earthed via an impedance.

19. A plant as claimed in any of claims 1-17,
5 characterized in that at least one generator (200) is directly earthed.

20. A plant as claimed in any of the preceding claims, characterized in that the stator (1) of the generator (200) is cooled at earth potential by means of a flow of gas and/or
10 liquid.

21. A plant as claimed in any of the preceding claims, characterized in that the cables (6) intended for high voltage have a conductor area of between 50 and 3000 mm² and have an outer diameter of between 20 and 250 mm.

15 22. A plant as claimed in any of the preceding claims, characterized in that at least one winding (9, 51-52) of the stator (1) is carried out with integral slot winding.

23. A plant as claimed in any of the preceding claims, characterized in that at least one winding (9, 51-52) of
20 the stator (1) is carried out with fractional slot winding.

24. A plant as claimed in any of the preceding claims, characterized in that the rotor (2) of at least one generator is arranged for two or four poles.

25. A plant as claimed in any of the preceding claims,
25 characterized in that the voltage level is controllable $\pm 20\%$ of the rated voltage.

26. A plant as claimed in any of the preceding claims, characterized in that the winding of the generator is arranged for self-regulating field control and lacks auxiliary
30 means for control of the field.

27. A plant as claimed in any of the preceding claims, characterized in that the stator of at least one generator is composed of axially combined, plate-shaped sections, preferably as whole sections in peripheral direction.

35 28. A plant for generating active and reactive electric power for a high-voltage distribution or transmission network (110), comprising at least one electric generator (200) which is coupled to at least one gas and/or steam turbine (102) via a shaft means (101) and comprises at least one winding, characterized in
40 that the winding of at least one of the electric generators

comprises an insulation system which, as regards its thermal and electrical properties, permits a voltage level in excess of 36 kv.

29. An electric generator (200) arranged to be coupled to at least one gas and/or steam turbine (102) via a shaft means (101) and comprising at least one winding, characterized in that the winding comprises a solid insulation system consisting of at least two semiconducting layers, each layer constituting essentially an equipotential surface, and also intermediate solid insulation, wherein at least one of the layers has substantially the same coefficient of thermal expansion as the solid insulation.

30. An electric generator as claimed in claim 29 that includes the features defining the generator claimed in any of claims 2-28.

31. A procedure for manufacturing an electric generator as claimed in claim 29 or claim 30, characterized in that the stator is wound at the plant site where the generator is to be used.

32. A procedure as claimed in claim 31, characterized in that the stator is manufactured at the factory axially divided into a plurality of plate-shaped, separate sections, each section preferably being manufactured as a whole section in peripheral direction.

ABSTRACT

In a plant containing a turbo-generator the magnetic circuit of the turbo-generator is included in an electric generator which directly
5 supplies a high supply voltage of 20 - 800 kV, preferably higher than 36 kV. The insulation of the generator is built up of a cable (6) comprising one or more current-carrying conductors (31) with a number of strands (36) surrounded by outer and inner semiconducting layers (34, 32) and intermediate insulating layers (33). The outer
10 semiconducting layer (34) is at earth potential. The phases of the winding are Y-connected. The Y-point may be insulated and protected from over-voltage by means of surge arresters, or else the Y-point may be earthed via a suppression filter.

(Figure 2.)

Fig. 1


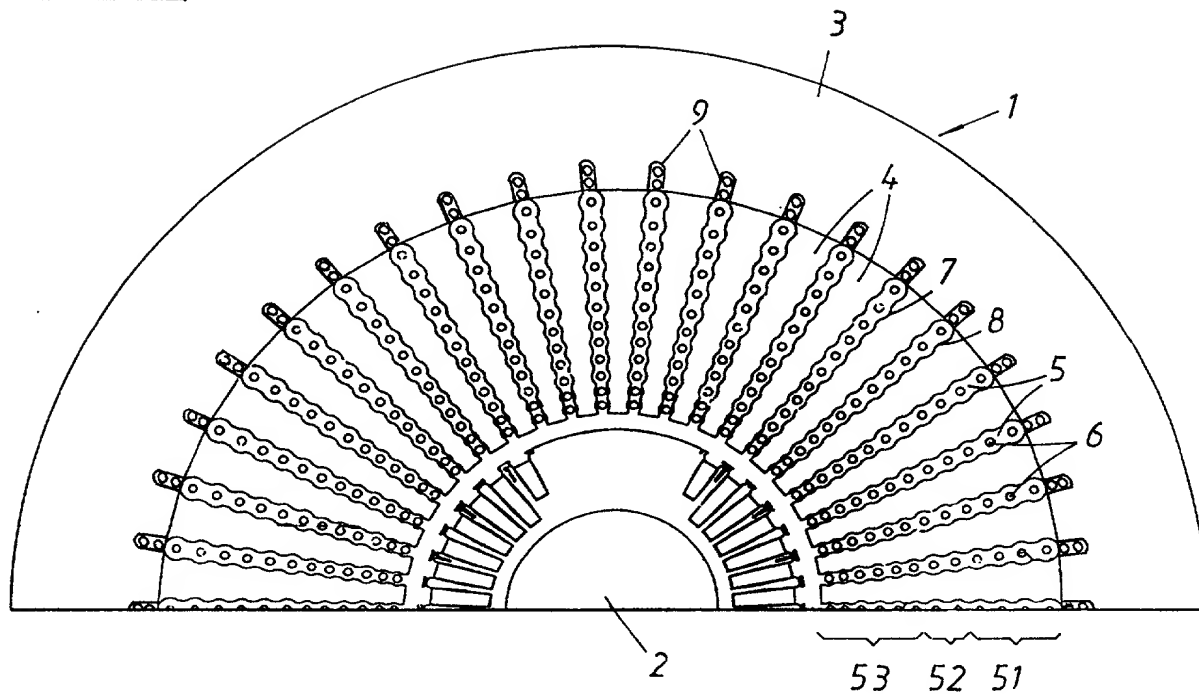


Fig. 2

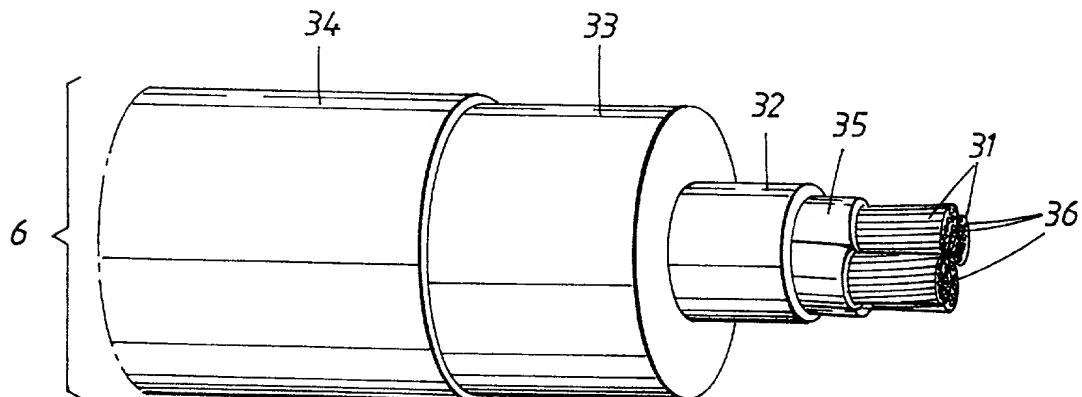

2 / 3

Fig. 3

Prior Art


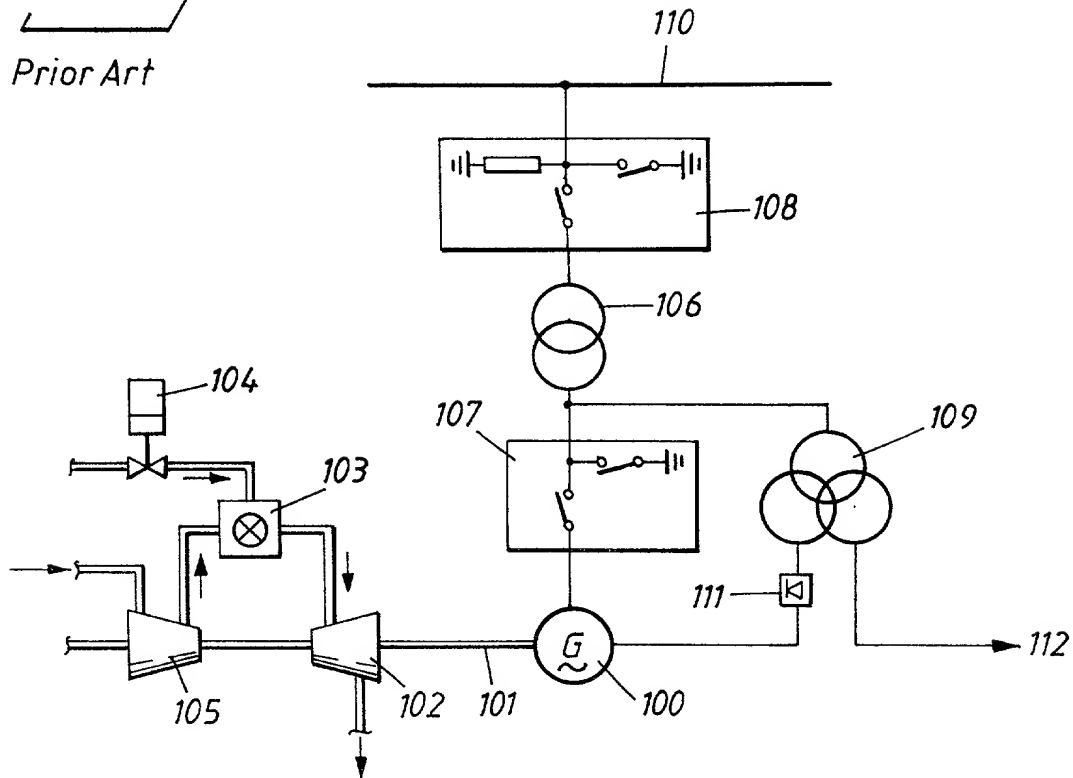


Fig. 4

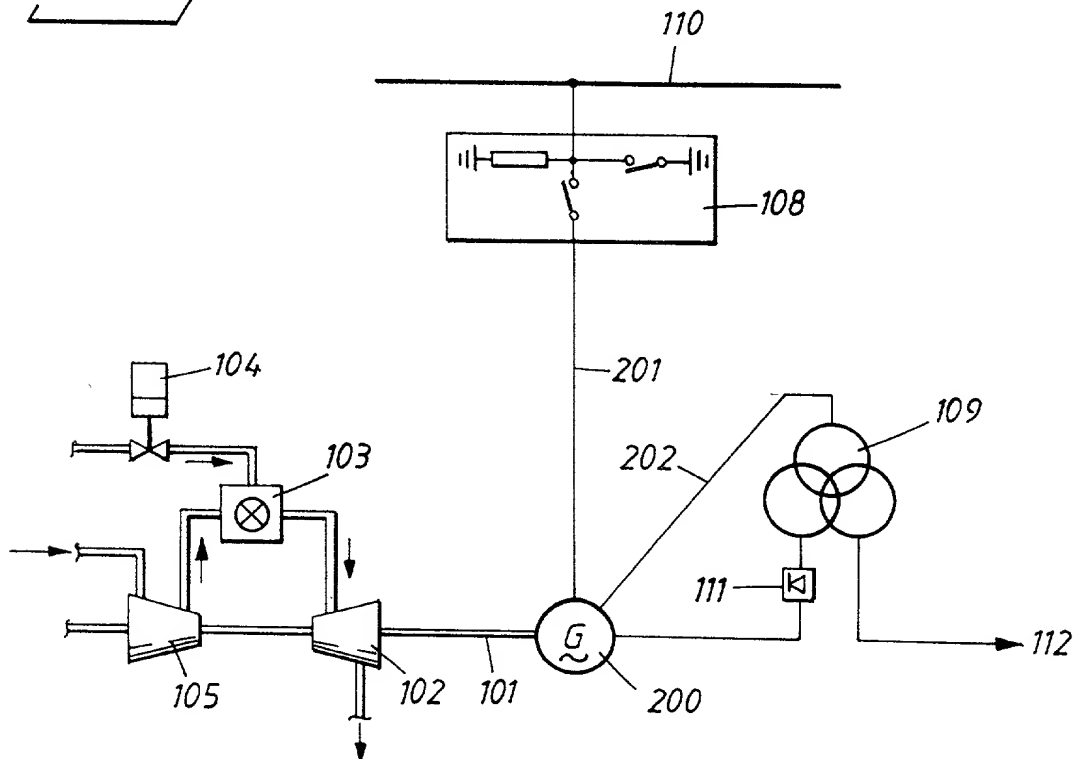

3 / 3

Fig. 5


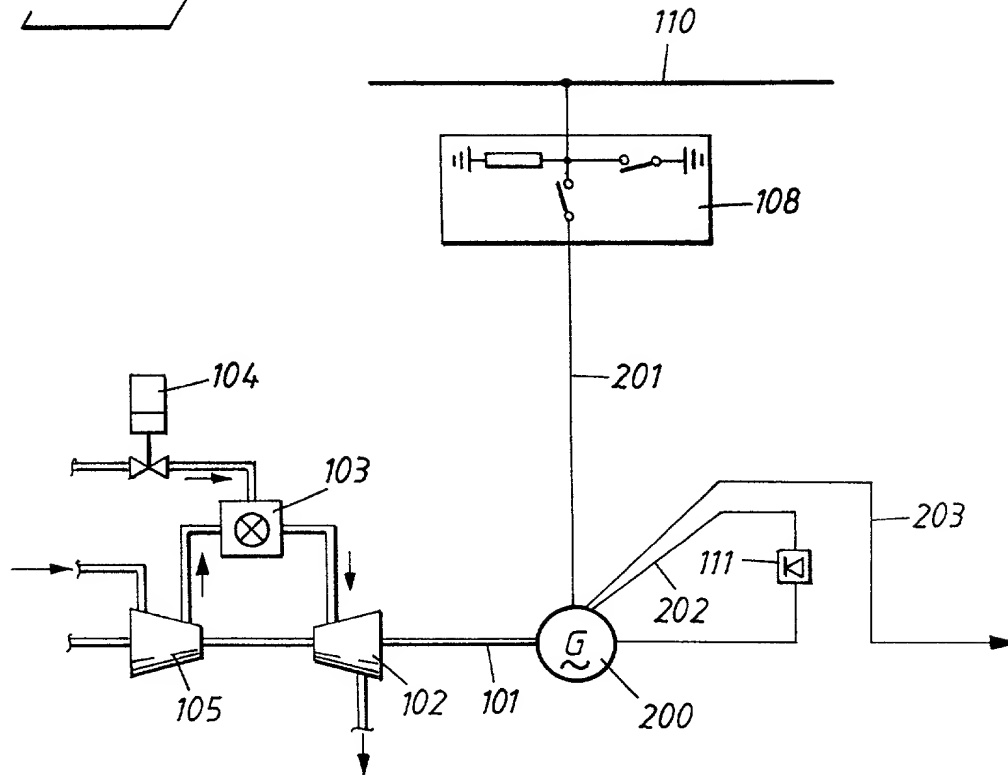


Fig. 6

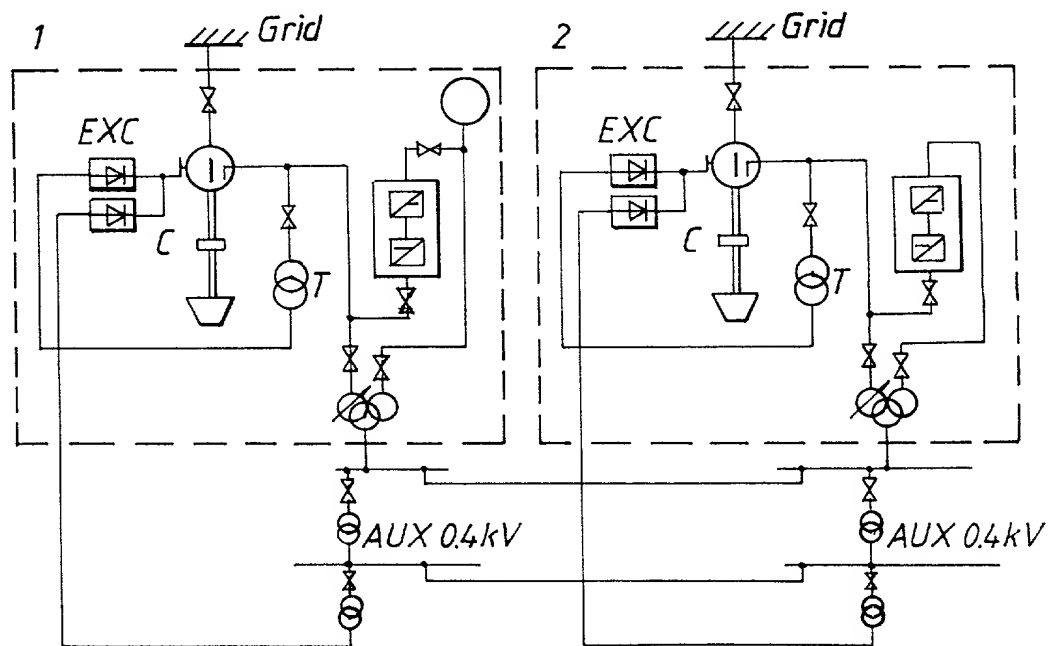

COMBINED DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION (Includes PCT)	Attorney Docket No. 70559-2/8241
---	-------------------------------------

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A TURBO-GENERATOR PLANT

the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____.

☒ was filed as PCT international application no. SE97/00886 on 27 May 1997, and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I do not know and do not believe the claimed invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I hereby claim priority benefits under Title 35, United States Code §119 of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application(s) on which priority is claimed:

Prior Application(s)			Priority Claimed	
<u>9602079-7</u>	<u>Sweden</u>	<u>29 May 1996</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	Day/Month/Year Filed	Yes	No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:



No.	Filing Date	Status	Application Serial
			(patented, pending, abandoned)

Application Serial No.	Filing Date	Status
		(patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Robert J. Lasker, Reg. No. 22,785; Lawrence R. Radanovic, Reg. No. 23,077; Richard H. Tushin, Reg. No. 27,297; Donald N. Huff, Reg. No. 27,561; and John P. DeLuca, Reg. No. 25,505. Direct all telephone calls to telephone no. (202) 628-0088 and faxes to (202) 628-8034.


Address all correspondence to John P. DeLuca, Esq., Watson Cole Grindle Watson, P.L.L.C., 1400 K Street, N.W., Suite 1000, Washington, D.C. 20005-2477.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Inventor	Inventor's Signature	Date
<u>Mats LEIJON</u>		<u>98-02-19</u>
Residence:		Citizenship
<u>Hyvlargatan 5, S-723 35 Västerås, Sweden</u>	<u>SEK</u>	<u>Sweden</u>
Post Office Address:		
<u>Same</u>		
Full Name of Second Inventor	Inventor's Signature	Date
<u>Peter TEMPLIN</u>		<u>98-02-19</u>
Residence:		Citizenship
<u>Dybecksgatan 4 B, S-731 40 Köping, SWEDEN</u>	<u>SEK</u>	<u>Sweden</u>
Post Office Address:		
<u>Same</u>		

390 Full Name of Third Inventor <u>Claes IVARSON</u>	Inventor's Signature <i>Claes Iverson</i>	Date 98-02-19
Residence: Barkarö Bygatan 221, S-725 91 <u>Västerås</u> , SWEDEN SEX		Citizenship Sweden
Post Office Address: Same		
400 Full Name of Fourth Inventor <u>Lars GERTMAR</u>	Inventor's Signature <i>Lars Gertmar</i>	Date 98-02-24
Residence: Humlegatan 6, S-722 26 <u>Västerås</u> , SWEDEN SEX		Citizenship Sweden
Post Office Address: Same		
500 Full Name of Fifth Inventor <u>Peter CARSTENSEN</u>	Inventor's Signature <i>Peter Carstensen</i>	Date 1998-02-20
Residence: Sjövägen 62, S-141 42 <u>Huddinge</u> , SWEDEN SEX		Citizenship Sweden DENMARK
Post Office Address: Same		
600 Full Name of Sixth Inventor <u>Bertil LARSSON</u>	Inventor's Signature <i>Bertil Larsson</i>	Date 98-02-19
Residence: Sammetsvägen 12, S-724 76 <u>Västerås</u> , SWEDEN SEX		Citizenship Sweden
Post Office Address: Same		

700 Full Name of Seventh Inventor <u>Sören BERGGREN</u>	Inventor's Signature <i>Sören Berggren</i>	Date 98-03-09
Residence: Vetterstorpsgratan 30, S-724 62 <u>Västerås</u> , SWEDEN SEK		Citizenship Sweden
Post Office Address: Same		
800 Full Name of Eighth Inventor <u>Erland SÖRENSEN</u>	Inventor's Signature <i>Erland Sörensen</i>	Date 980219
Residence: Gudruns väg 32, S-723 55 <u>Västerås</u> , SWEDEN SEK		Citizenship Sweden
Post Office Address: Same		
900 Full Name of Ninth Inventor <u>Bertil BERGGREN</u>	Inventor's Signature <i>Bertil Berggren</i>	Date 98-02-27
Residence: Rönnergagatan 2 B, S-723 46 <u>Västerås</u> , SWEDEN SEK		Citizenship Sweden
Post Office Address: Same		
1000 Full Name of Tenth Inventor <u>Gunnar KYLANDER</u>	Inventor's Signature <i>Gunnar Kylander</i>	Date 980219
Residence: Stentorpsgratan 16 A, S-723 43 <u>Västerås</u> , SWEDEN SEK		Citizenship Sweden
Post Office Address: Same		

Full Name of Eleventh Inventor <u>Mons HÖLLELAND</u>	Inventor's Signature 	Date 5/8 - 02 - 24
Residence: Fornforskargatan 52, S-723 53 <u>Västerås</u> , SWEDEN SEK		Citizenship Sweden
Post Office Address: Same		

1100

ATTACHMENT A

Docket No. 70559-2

APPLICANT(S) FOR DO/EO/US

LEIJON, Mats;

TEMPLIN, Peter;

IVARSON, Claes;

GERTMAR, Lars;

CARSTENSEN, Peter;

LARSSON, Bertil;

BERGGREN, Sören;

SÖRENSEN, Erland;

BERGGREN, Bertil;

KYLANDER, Gunnar; and

HÖLLELAND, Mons